


# SRFS TELEINFRA

## N FEMALE TO BNC MALE ADAPTOR

Get connected with us:

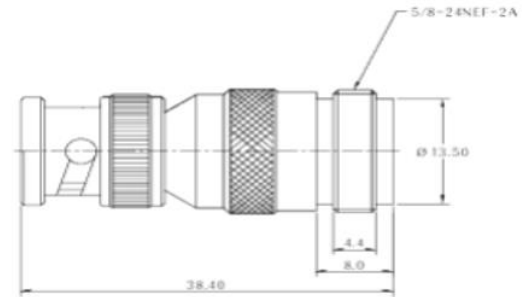

Electrical & Mechanical Specifications		
Characteristics Impedance	50 ohm	
Frequency Range	DC-3GHz	
VSWR	1.30:1	
Dielectric Withstanding Voltage	≤ 1000V RMS,50Hz, at sea level	
Working Voltage	335V max	
Contact Resistance	Center Contact ≤ 3mΩ Outer Contact ≤ 2mΩ	
Dielectric Resistance	≥5000MΩ	
Durability	Mating cycles ≥500	
Material & Plating		
	<b>Material</b>	<b>Plating</b>
Body	Brass	Ni
Insulator	PTFE	-
Center Contact(pin)	Brass, Be-Cu	Au
Environmental Specification		
Temperature Range	- 55°C ~ +165 °C	
RoHS Compliant	Yes	

Add: plot no 10 shiv Vihar a block Najafgarh Sahiba river road Vikas Nagar Uttam nagar new delhi-110059

+91-8435474330, +91-8800726650, +91 8076749052 [info@srfsteleinfra.in](mailto:info@srfsteleinfra.in), [aayush@srfsteleinfra.in](mailto:aayush@srfsteleinfra.in), [srfsteleinfra@gmail.com](mailto:srfsteleinfra@gmail.com)

[www.srfsteleinfra.in](http://www.srfsteleinfra.in), [www.srfsteleinfra.com](http://www.srfsteleinfra.com)

